

Hornschuh
d-c-wall®



Hornschuh
d-c-home®

ceramics
my other wall


ceramics

Attractive tile look for your walls


With **d-c-wall® ceramics**, you can bring the high-quality look and ease of care of real tiles to your walls. Whether as a splash guard, a visual enhancement, or a backsplash in the kitchen, bathroom, or laundry room: the washable and resistant wallcovering is installed like wallpaper (see instructions). This enables you to achieve a high-quality tile look without investing a great deal of time and expense. Avoid the dirt and irritation that comes with laying real tiles. Because **d-c-wall® ceramics** are a very clean solution. If you are looking for an attractive do-it-yourself tile look, **d-c-wall® ceramics** is the first solution.



Attractive tile look for your walls

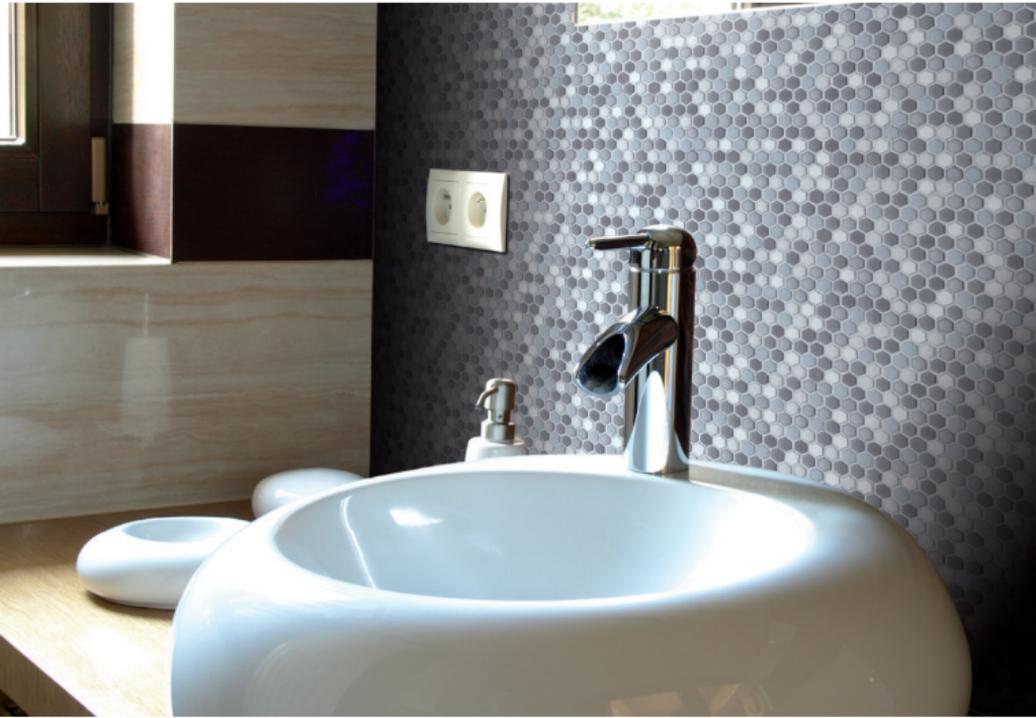


Instructions for application



Preparation of under-surface and individual sections

Surfaces (tiles or walls) should ideally be smooth, solid, dry and free of cracks and holes. Any uneven areas have to correct by the use of appropriate filling material (e.g. Metylan surface filler for absorbent under-surfaces).

Cut the first strip from the roll by placing the beginning of the pattern at the top and allowing a slight overlap at the bottom.




Application of adhesive

For **absorbent under-surfaces**, such as cement or plasterboard, use a normal commercial wallpaper paste for heavy-grade wallpapers (e.g. Metylan Special). Apply the paste to the cut strip, fold it together and allow it to absorb the paste for about 10 minutes.

For non-absorbent under-surfaces, for example oil-treated or painted areas, use normal commercial dispersion adhesive (e.g. Ovalit S). Moisten the rear surface of the strip with water, allow it to soak in for about 10 minutes and then apply the adhesive to the wall over the area intended for the cut strip.

You should always follow the application instructions provided by the adhesive manufacturer.




Application of wall covering

Apply the first strip, starting at the top, and ensure vertical alignment. Cut the next strips to ensure the alignment of the tile pattern, with the necessary overlap at top and bottom, and place it next to the previous strip after applying adhesive. Avoid the need to make joins in the corner the rooms.


Instructions for application

Attention: Immediately remove any spots of adhesive with clean water!



Sealing


In particular in rooms which are subject to moisture, it is essential to ensure that all edges and joins are sealed with PVC cold welding paste (for PVC wall coverings). This prevents moisture from penetrating underneath the all covering. When finished, ensure that the room is well ventilated!



Cleaning and care

Ceramics is completely waterproof. It is therefore easy to undertake cleaning and maintenance. The cleaning can, for example, be carried out with mild liquid commercial cleaners, soapsuds or similar. Afterwards, always wash the wall covering thoroughly with clean water.


Warning: Always avoid contact with acetone, cleaning solvents and direct heat!



Replacement

Even many years later, it is easy to remove the PVC surface by separating it from the support paper at an upper or lower corner and pulling it in its dry state from the backing. The paper layer which remains on the wall is an ideal under-surface for a subsequent wallpapering activity.

ceramics

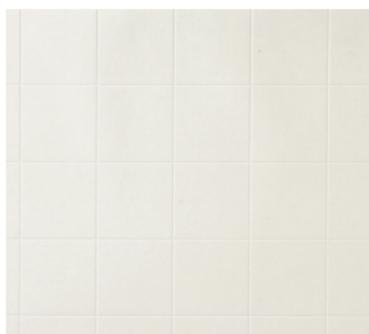

Cremona

270-0150 67,5 cm × 20 m



Salerno

270-0151 67,5 cm × 20 m



Cuneo

270-0152 67,5 cm × 20 m



Prato

270-0153 67,5 cm × 20 m



Ancona blau

270-0154 67,5 cm × 20 m



Ancona grau

270-0155 67,5 cm × 20 m



Savona

270-0156 67,5 cm × 20 m



Carrara


270-0157 67,5 cm × 20 m

Overview of range



Caserta

270-0158 67,5 cm × 20 m

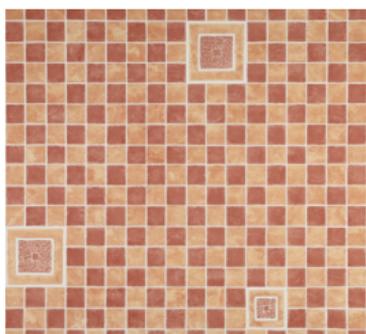

Novara

270-0159 67,5 cm × 20 m



Carpi

270-0160 67,5 cm × 20 m




Stone wall grau

270-0161 67,5 cm × 20 m




Stone wall sand

270-0162 67,5 cm × 20 m

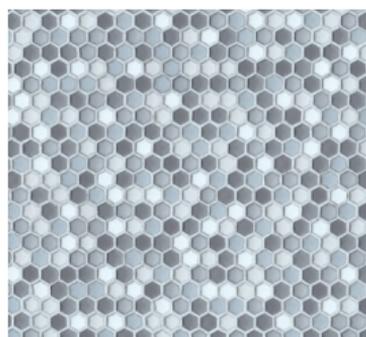

Hexagon grau

270-0163 67,5 cm × 20 m

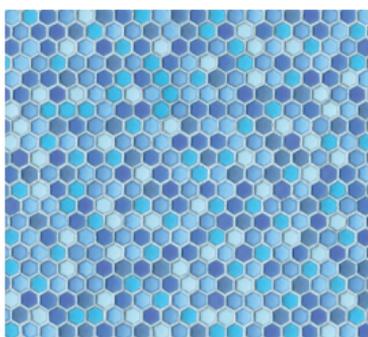

Hexagon blau

270-0164 67,5 cm × 20 m



Wave

270-0165 67,5 cm × 20 m



1658

Konrad Hornschuch AG · Salinenstr. 1
74679 Weißbach · Deutschland

Kollektion Ceramics F270

16

EN 15102:2007+A1:2011

Dekorative Wandbekleidung zur Nutzung in Gebäuden

Brandverhalten

Klasse E

an Faserzementplatten mit
einem Tapetenkleister verklebt

Formaldehydabgabe

bestanden

**Schwermetalle und
bestimmte Elemente**

bestanden

**Vinylchloridmonomer
(VCM)**

bestanden

Schallabsorption

NPD

Wärmedurchlasswiderstand

NPD



dchome

Hornschuch
d-c-wall®

d-c-wall® is a brand name of
Konrad Hornschuch AG
Salinenstraße 1
74679 Weißbach
GERMANY
Tel.: 07947 81-0
info@hornschuch.de
www.hornschuch.com

K392-6054



4 007386 332714

03.2017