























click&joy®

click Design-Vinyl

3	Product characteristics				
5	The floor for all applications				
6	Advantages of click & joy® click design vinyl				
8	click & joy® plank floors Barrique Eiche / Newcastle Oak / Santana Oak / Avondale Eiche	 4.2 mm	 0.3 mm	 1220 mm	 180 mm
10	click & joy® tiled floors Avellino light grey / Schiefer / Portland grau	 4.2 mm	 0.3 mm	 610 mm	 305 mm
12	click & joy® plank floors Sheffield Oak / Kalk Esche / Coleford Wood / Castle Oak	 5.0 mm	 0.55 mm	 1220 mm	 180 mm
14	click & joy® plank floors with surrounding designer joint Sonoma Eiche / Auburn Oak / Silverdale Pine gekalkt	 5.0 mm	 0.55 mm	 1220 mm	 229 mm
16	click & joy® Installation instructions				
18	click & joy® – Questions and Answers				



<b>overall height</b>	4.2 mm or 5.0 mm, respectively	
<b>wear layer</b>	0.3 mm or 0.55 mm	
<b>non-hazardous to health pursuant</b> to DIBt guidelines		
simple installation and can be reused		
suitable for under floor heating, max. 27° Celsius		
extremely robust		
Anti-slip		
water-resistant		
<b>manufacturer's warranty</b> 10 years (4.2 mm) or 15 years (5.0 mm), respectively, for wear and tear		
<b>fire protection class</b>	B <sub>fl</sub> -S1 (flame-resistant)	

## Wear classes

### 4.2 mm



23 (living area)



31 (contract area)

### 5.0 mm



33 (contract area)



42 (light industry)









## The floor for all applications

With our **click & joy**® vinyl planks, we offer an attractive and easy-to-care-for floor covering, which perfectly matches any room concept.

Whether at home, in the office, or in commercial applications: **click & joy**® is ideal for renovation and new installation. Installed in no time, the design panels meet all requirements.

The natural surfaces and embossings give any room a unique ambience.

## click&joy® Advantages



### Low installation height

**click & joy®** vinyl flooring can simply be installed floating over the existing floor. The low installation height simplifies renovation. Thus, the expensive shortening of doors is often unnecessary.



### Water-resistant

Due to its innovative product design, **click & joy®** vinyl flooring is especially suitable for use in rooms which are exposed to water or moisture.



### Warm under foot

The pleasantly warm surface of **click & joy®** vinyl flooring feels very comfortable.






### Footfall sound absorption

The elastic properties of **click & joy®** vinyl flooring mean that sound is not transferred to the complete floor area.



### Long-lasting and robust

The long-lasting and robust surface of **click & joy®** vinyl flooring is extremely durable. Its anti-slip surface makes this a safe covering for all floors.

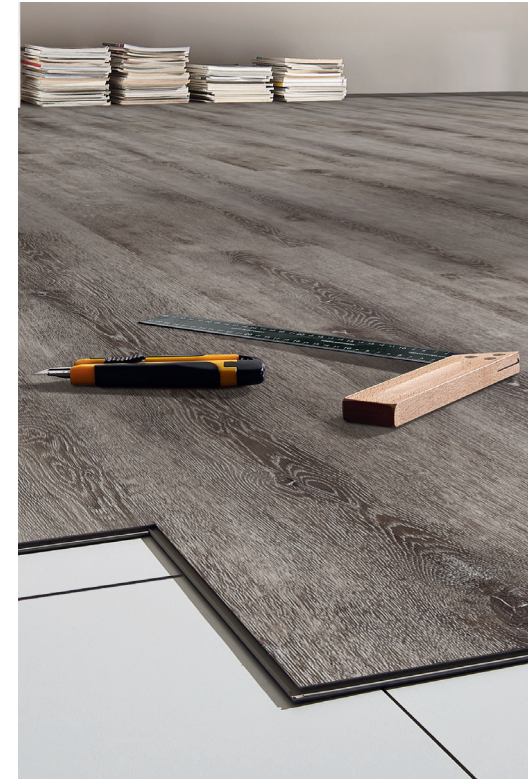

### Simple installation

**click & joy®** vinyl flooring has click connectors and can therefore be simply and easily installed as a floating floor. You require only a few tools (square, cutter) and no great feats of craftsmanship.









**Newcastle Oak**



370-0002

1220 mm × 180 mm

10 units 2,196 m<sup>2</sup>



**Santana Oak**



370-0003

1220 mm × 180 mm

10 units 2,196 m<sup>2</sup>



**Barrique Eiche**



370-0004

1220 mm × 180 mm

10 units 2,196 m<sup>2</sup>



**Avondale Eiche**



370-0005

1220 mm × 180 mm

10 units 2,196 m<sup>2</sup>





Portland grau





**Avelino light grey**



370-0006

305 mm × 610 mm

10 units 1.861 m<sup>2</sup>



**Schiefer**



370-0007

305 mm × 610 mm

10 units 1.861 m<sup>2</sup>



**Portland grau**



370-0008

305 mm × 610 mm

10 units 1.861 m<sup>2</sup>





Coleford Wood





**Sheffield Oak**



370-0100

1220 mm × 180 mm

8 units 1.757 m<sup>2</sup>



**Kalk Esche**



370-0103

1220 mm × 180 mm

8 units 1.757 m<sup>2</sup>



**Castle Oak**



370-0104

1220 mm × 180 mm

8 units 1.757 m<sup>2</sup>



**Coleford Wood**




370-0105

1220 mm × 180 mm

8 units 1.757 m<sup>2</sup>





Silverdale Pine gekalkt






**Sonoma Eiche**



370-5001

1220 mm × 229 mm

7 units 1.956 m<sup>2</sup>

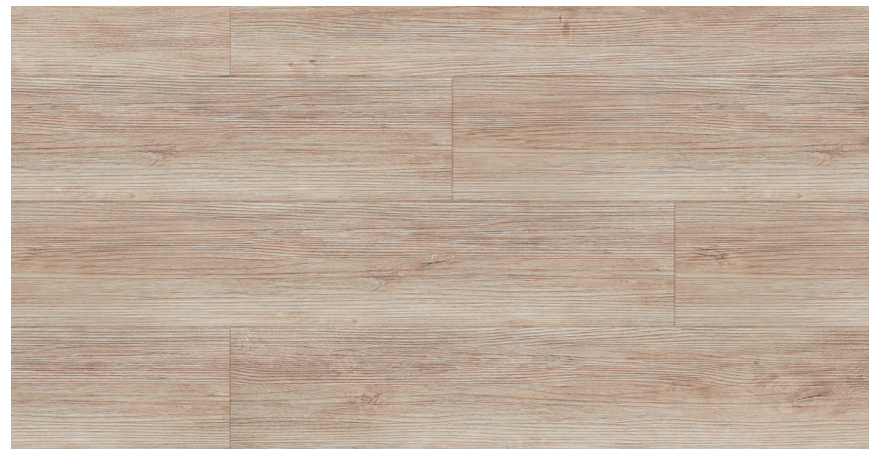

**Auburn Oak**



370-5002

1220 mm × 229 mm

7 units 1.956 m<sup>2</sup>



**Silverdale Pine gekalkt**



370-5003

1220 mm × 229 mm

7 units 1.956 m<sup>2</sup>



# Install click&joy® as quick as a flash with no prior experience



## 1. Preparation

click & joy® vinyl flooring can be installed on hard floors and other surfaces, which are dry, level, free of cracks, sturdy/pressure-resistant, clean, stable, and permanently connected to the subsurface. We recommend the use of footfall sound insulation (must be suitable for designer flooring) as this can compensate for any unevenness and extends the useful life of click & joy® vinyl flooring. In addition, this can reduce the labour-intensive preparation of the subsurface. Acclimatise click & joy® vinyl flooring 48 hours before the installation in the rooms in which it is to be installed at  $> 18^{\circ}\text{C}$ . The only tools you need are a square, a boxcutter, a cutting board, and a rubber mallet.



## 3. Distance from the wall

Also ensure that the panels are installed a minimum of 5 mm away from the wall. Use suitable spacers for this.



## 2. The first row

Install the panels of the first row with the narrow side oriented toward the main light source. The panels are installed from left to right with the tongue side of the panel facing the wall. Ensure that the ends with tongues and grooves fit together precisely. Lock these together carefully with strong thumb pressure or with a rubber mallet.



## 4. Cutting

Use a suitable cutting board for cutting and proceed as follows: place the square at the desired cutting point and cut the panel on the top side with a boxcutter using uniform pressure.



## Install click&joy® as quick as a flash with no prior experience



### 5. Breaking along the scored line

Now, bend the scored panel slightly back and forth until it separates. Insert the cut piece at the end of the row. Now, begin the next row with the remaining piece, which should be at least 30 cm long.



### 7. Installation 2 – long side connection


Now, lift the panel at a slight angle and insert it into the longitudinal groove of the front row. After locking in place, the closed connection should now lie flat on the subsurface without tension.

When installing the last row, ensure that this is a half-panel width, if possible.



### 6. Installation 1 – narrow side connection

During further installation, insert the next panels into the end connection at an angle of 30 degrees.

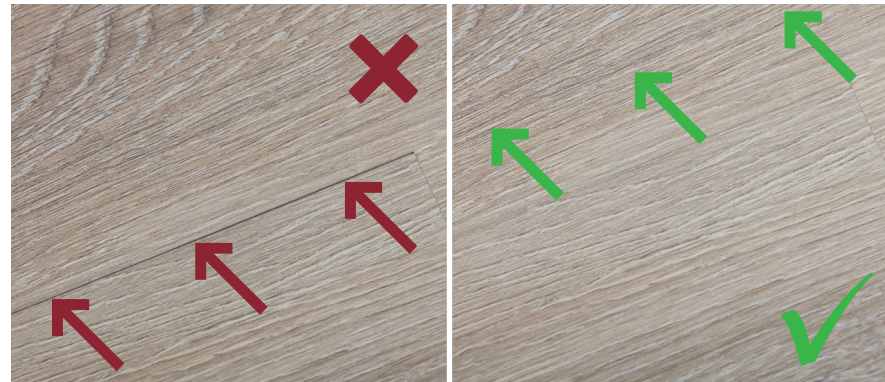

### Tip

In order to prevent the connection from opening later, care should be taken to ensure that the click connections are actually closed.





### **Is click & joy® vinyl flooring non-hazardous?**

**click & joy®** vinyl flooring is non-hazardous because this is a DIBt emissions-tested construction product, which meets all requirements for CE-marking.

### **Can click & joy® vinyl flooring be installed in the bathroom?**

**click & joy®** Design-Vinyl is suitable for use in rooms with increased levels of moisture as long as standing water is quickly removed. The expansion joint can be sealed with silicone at the toilet/bathtub/shower (please do not use any acrylic-based silicone). However, care should be taken here to ensure that not the entire expansion joint is filled.

### **Is it necessary to use a vapour barrier?**

If **click & joy®** vinyl flooring is installed directly on mineral substrates such as concrete or screed, we recommend using a vapour barrier. This protects your vinyl flooring from moisture from below.

### **What do I need to pay attention to when installing click & joy® vinyl flooring?**

In general, the guidelines of the standard for flooring works VOB, Part C, DIN 18365 must be complied with when using **click & joy®** vinyl flooring.

For floating installation, a space of > 5mm must be maintained between the flooring and the wall or all fixed structural elements. You can use spacers or cut-offs for this. During installation, please ensure that the tongue-and-groove joint and the corners are not damaged.

### **On what surfaces can click & joy® vinyl flooring be installed?**

**click & joy®** vinyl flooring can be installed on all hard floors and other surfaces, which are dry, level, free of cracks, resistant to tension and pressure, clean, stable, and permanently connected to the surface. Textile surfaces must be removed for hygiene (risk of mould formation) and stability.



## Is it necessary to use sound insulation?

The elastic nature of **click & joy®** vinyl flooring does not transfer the complete footfall sound to the complete floor area. For this reason, **click & joy®** vinyl flooring could also be installed without footfall sound insulation. In spite of this, we recommend the use of footfall sound insulation (such as designer flooring underlay Seltibloc) because this can compensate for small irregularities of up to 1 mm and extend the useful life of **click & joy®** vinyl flooring. In addition, this can also reduce the often labour intensive preparation of the surface.

## Can click & joy® vinyl flooring be used on an underfloor heating system?

**click & joy®** vinyl flooring can be installed on a warm water underfloor heating system if it is ensured that the temperature at the surface does not exceed 27° C for extended periods. For more on this, see the standards DIN EN1264 and DIN 4725 and the heating protocol. The screed must be prepared in accordance with DIN 18353.

## How can click & joy® vinyl flooring be cleaned?

Dry cleaning – with a broom, dust mop, or vacuum cleaner– is usually sufficient. During wet cleaning, do not use too much water, as remaining moisture which penetrates the joints and edges, can damage many surfaces, such as linoleum, parquet, or wood. A damp mop is sufficient for cleaning

## Is it necessary to acclimatise click & joy® vinyl flooring before installation?

Yes, **click & joy®** vinyl flooring must be acclimatised for at least 48 hours at min. 18°C before installation. The temperature must also be at least 15°C during installation

## Is click & joy® vinyl flooring suitable for outdoor use?

No, **click & joy®** vinyl flooring was specially developed for indoor use and should not be used outdoors.

## Is click & joy® design vinyl suitable for installation in conservatories?

When installing the flooring in the conservatory and also in buildings with large window façades, which heat the floor in one spot (or with a surface temperature that is constantly above 35°C in conjunction with direct sunlight), sufficient shade must be provided. If this is not done, the floor covering can be permanently damaged due to cupping, waviness, or opening of the click connection. In addition to shade, we recommend enlarging the expansion joint.



You can find an instructional installation video at [clickandjoy.de](https://clickandjoy.de) or scan the QR code.





## click&joy®

is a trademark of  
Konrad Hornschuch AG  
Salinenstr. 1  
74679 Weißbach  
Deutschland/Germany  
Phone +49 7947 81-0  
Fax +49 7947 81-300  
[info@hornschuch.de](mailto:info@hornschuch.de)  
[www.hornschuch.com](http://www.hornschuch.com)

K392-6086

